


SHAPE BEFORE CONCRETE SETS AND REMOVE TOP HALF OF PIPES WITHIN MANHOLE AS SHOWN. USE CLASS B CONCRETE.

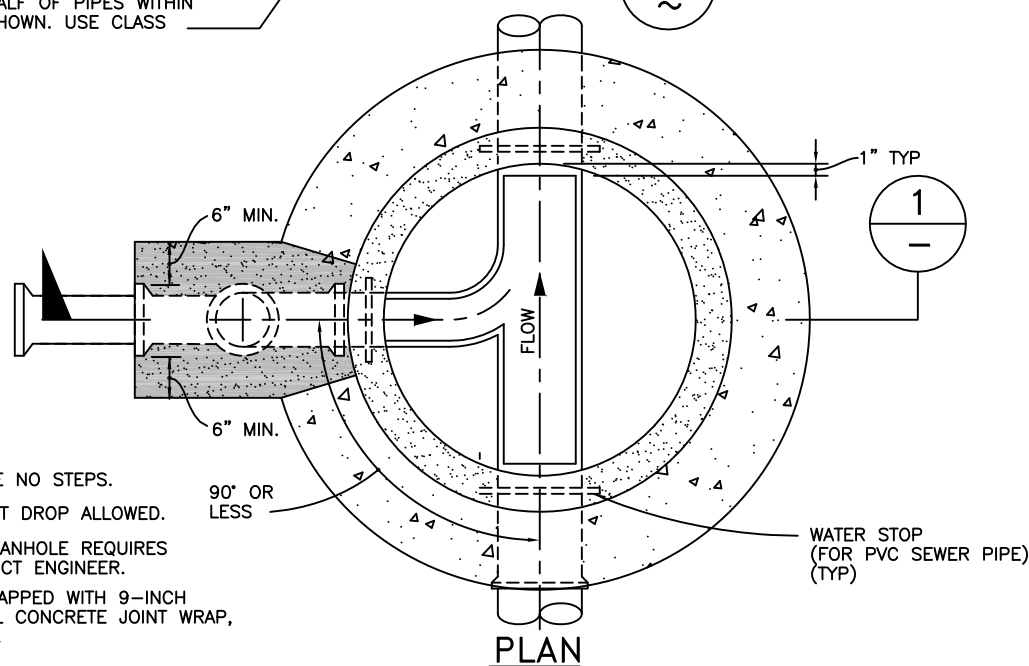

NOTES:

1. MANHOLE SHALL HAVE NO STEPS.
2. MAXIMUM OF 10-FOOT DROP ALLOWED.
3. THE USE OF DROP MANHOLE REQUIRES APPROVAL BY DISTRICT ENGINEER.
4. JOINTS SHALL BE WRAPPED WITH 9-INCH RUB'R-NEK EXTERNAL CONCRETE JOINT WRAP, OR APPROVED EQUAL.

REV. 11/11

Dublin San Ramon Services District	DATE NOV 1987
DROP MANHOLE	DESIGNED SRH
SIGNED COPY ON FILE AT DISTRICT OFFICE	DRAWING S-3