


MODEL 135D, 235D, 245D

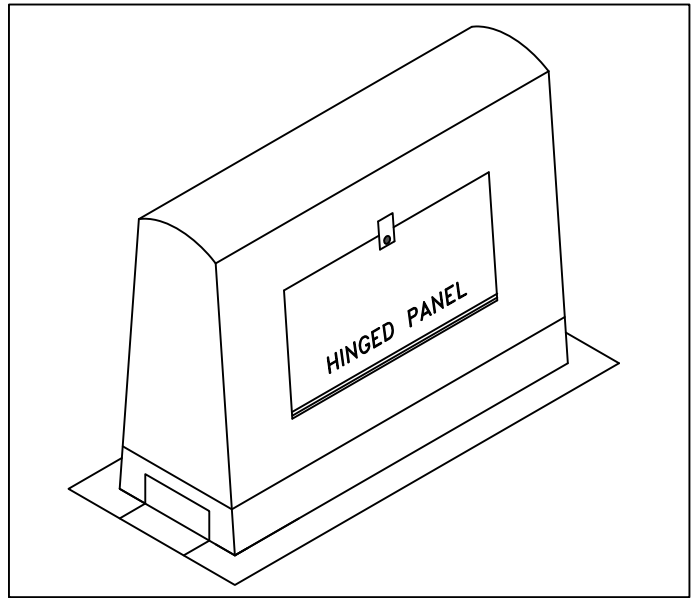

MODEL 335D, 435D, 635D, 835D

SAFE-T-COVER MODEL	TYPICAL INSTALLATION	INSIDE DIMENSIONS		
		W	L	H
130D-FG	3/4"-1"	8	25	19
135D-FG	3/4"-1"	9	26	19
230D-FG	1 1/4"-2"	11	35	24
235D-FG	1 1/4"-2"	12	37	30
240D-FG	1 1/4"-2"	12	46	30
245D-FG	1 1/4"-2"	12	46	31
335D-FG	2 1/2"-3"	24	67	45
435D-FG	4"	29	65	50
635D-FG	6"	28	104	49
835D-FG	8"-10"	40	157	74

NOTE: ENCLOSURE SHALL BE SAFE-T-COVER BY HYDROCOWL OR APPROVED EQUAL.

REV. 08/01

Dublin San Ramon Services District	DATE JUL 2000
FIBERGLASS ENCLOSURE FOR BACKFLOW PREVENTER	DESIGNED ----
SIGNED COPY ON FILE AT DISTRICT OFFICE	DRAWING W-25